


## MLS6008 Fiber - Single Jacket All Dielectric Cable

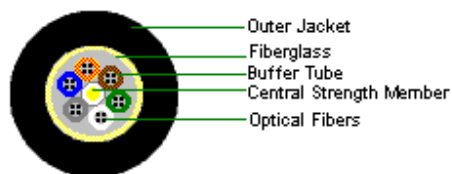

For more Information  
please call

1-800-Belden1

**Description:**

This cable features Belden's® water-blocking agent for a craft-friendly, no mess, hassle-free cable preparation experience. This cable utilizes Gigabit Ethernet Grade fibers for new expanded bandwidth applications.

**Physical Characteristics (Overall)**

<b>Fiber Type:</b>	62.5/125/245 Micron
<b>Number of Fibers:</b>	8
<b>Core Diameter:</b>	62.5 +/- 2.5
<b>Core Non-Circularity:</b>	5% Maximum
<b>Clad Diameter:</b>	125 +/- 2
<b>Primary Coating Material:</b>	Acrylate
<b>Primary Coating Diameter:</b>	245 +/- 10

**Fiber Color Code Chart:**

Color
Blue
Orange
Green
Brown
Gray
White

<b>Buffer Tube Diameter:</b>	1.9
<b>Buffer Tube Material:</b>	PBT - Polybutylene Terephthalate
<b>Buffer Tube Filling Material:</b>	Synthetic Thixotropic Gel

**Buffer Tube Color Code Chart:**

Number	Color
1	Blue
2	Orange

<b>Core-clad Offset:</b>	1.5 Microns Maximum
--------------------------	---------------------

**Outer Jacket****Outer Jacket Material:**

Outer Jacket Material
MDPE - Medium Density Polyethylene

<b>Outer Jacket Nominal Wall Thickness:</b>	.055
<b>Outer Jacket Ripcord:</b>	Polyester
<b>Outer Jacket Color:</b>	Black

**Strength Member**

<b>Strength Member Material:</b>	Fiberglass Epoxy Rod, Aramid Yarn
----------------------------------	-----------------------------------

**Overall Cabling**

<b>Overall Cabling Fillers:</b>	Polyethylene
<b>Overall Nominal Diameter:</b>	0.375 in.

**Mechanical Characteristics (Overall)**

<b>Storage Temperature Range:</b>	-50°C To +80°C
-----------------------------------	----------------

**MLS6008 Fiber - Single Jacket All Dielectric Cable**

<b>Operating Temperature Range:</b>	-40°C To +70°C
<b>Bulk Cable Weight:</b>	70 lbs/1000 ft.
<b>Min. Bend Radius (Install)/Minor Axis:</b>	7.500 in.
<b>Min. Bend Radius for Long Term Application:</b>	5.600 in.
<b>Crush Resistance:</b>	Passes TIA/EIA 455-41
<b>Impact Resistance:</b>	Passes TIA/EIA 455-25
<b>Solar Radiation Resistance:</b>	High
<b>Water Penetration:</b>	Passes TIA/EIA 455-82
<b>Compound Flow:</b>	Passes TIA/EIA 455-81
<b>Cyclic Flexing:</b>	Passes TIA/EIA 455-104
<b>Max. Load for Installation:</b>	600 lbs.
<b>Max. Load for Long Term Application:</b>	180 lbs.
<b>Proof Test:</b>	100 kpsi

**Applicable Specifications and Agency Compliance (Overall)****Applicable Standards & Environmental Programs**

<b>IEEE Specification:</b>	802.3Z
----------------------------	--------

**Suitability**

<b>Suitability - Outdoor:</b>	Excellent
<b>Suitability - Aerial:</b>	Excellent
<b>Sunlight Resistance:</b>	High

**Plenum/Non-Plenum**

<b>Plenum (Y/N):</b>	No
----------------------	----

**Optical Characteristics (Overall)**

<b>Maximum Attenuation @ 850nm:</b>	3.25 dB/km
<b>Maximum Attenuation @ 1300nm:</b>	1.0 dB/km
<b>Point Loss @ 850nm &amp; 1300nm:</b>	0.2
<b>Minimum Bandwidth @ 850nm:</b>	200 MHz*km
<b>Minimum Bandwidth @ 1300nm:</b>	500 MHz*km
<b>Refractive Index @ 850nm:</b>	1.496
<b>Refractive Index @ 1300nm:</b>	1.491
<b>Numerical Aperature:</b>	0.2751
<b>Maximum Gigabit Ethernet Length @ 850nm:</b>	300
<b>Maximum Gigabit Ethernet Length @ 1300nm:</b>	550

**Put Ups and Colors:**

Item #	Putup	Ship Weight	Color	Notes	Item Desc
--------	-------	-------------	-------	-------	-----------

Revision Number: 2    Revision Date: 05-14-2007

© 2010 Belden, Inc  
All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or

---

## MLS6008 Fiber - Single Jacket All Dielectric Cable

exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.